

GEO

GLAZED CERAMIC | WALL TILES

COLOUR PATTERN SELECT




JOHNSON • TILES 

MADE IN THE UK SINCE 1901

GEO

Exploring simple abstract shapes that create a patchwork effect, Geo is available in 2 classic natural colours of Ash and Tan. The subtle texture and gloss print elevate the collection to provide surface detail and versatility. Combine and connect the various shapes to create limitless configurations ideal for a statement wall.

Front Cover Image: Ash Satin 150x150mm - GEO1A & Tan Satin 150x150mm - GEO2A.

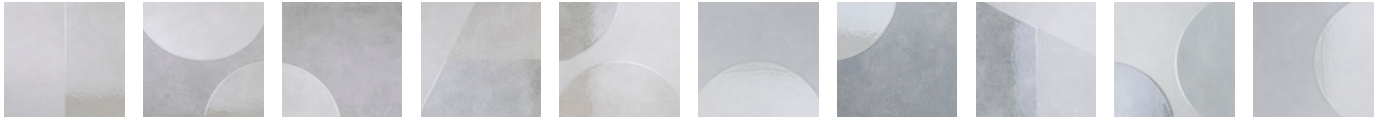



Ash Satin 150x150mm - GEO1A
Tan Satin 150x150mm - GEO2A



Ash Satin 150x150mm - GEO1A
Tan Satin 150x150mm - GEO2A




Ash Satin 150x150mm - GEO1A
Tan Satin 150x150mm - GEO2A



Colours & Product Codes

VI: Low Shade Variation

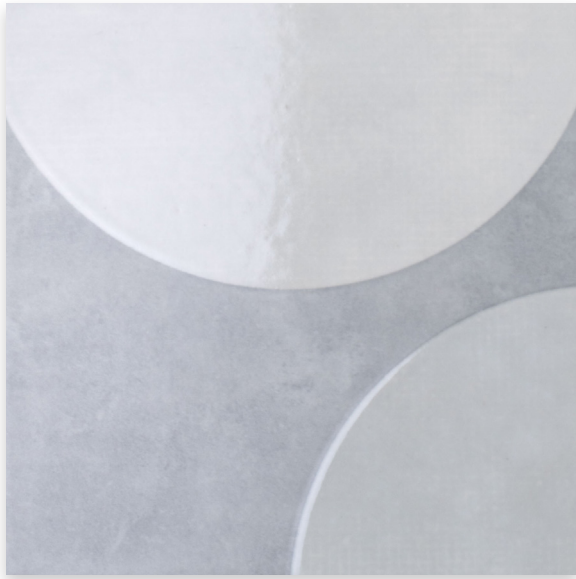

ASH

Product Code: GEO1A

TAN


Product Code: GEO2A

Note: Geo Ash and Tan has 6 different face designs with 18 variations available. All of the designs and variations are randomly mixed within each box.



Size Formats

Finishes & Availability



#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	150x150mm	Satin	All Colours Shown	6.5mm	44 Tiles	0.99 m ²	11.50 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website.














Technical Information

Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Geo	All Sizes Shown 	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Note: CSV: Colour Shade Variation. **Key to Finishes:**  Satin

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
 Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.25\%$	 Modulus of Rupture EN ISO 10545 - 4	Min. 1.5N / mm ²	$\geq 25\text{N} / \text{mm}^2$
 Thickness EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$	 Thermal Shock EN ISO 10545 - 9	Pass	Pass
 Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.15\%$	 Frost Resistance EN ISO 10545 - 12	-	Not Suitable
 Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$	 Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A - B
 Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.3\%$	 Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class C
 Water Absorption EN ISO 10545 - 3	10% to 20%	15% to 17%	 Fire Rating	-	Class A I Non Combustible
 Weight / M²	11.61 kg 6.5mm thick				

Note: All glazed ceramic [BIII] products shown in this range overview conform to BS EN 14411.

Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Geo	Glazed Ceramic [BIII]	Yes	Up to 20%	Up to 100%	Up to 100%

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.





**Product
Notes**

A series of horizontal dashed lines for writing notes.

For more information about Geo or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: October 2021

JOHNSON • TILES 
MADE IN THE UK SINCE 1901