
MELROSE

GLAZED CERAMIC | WALL TILES

COLOUR SELECT





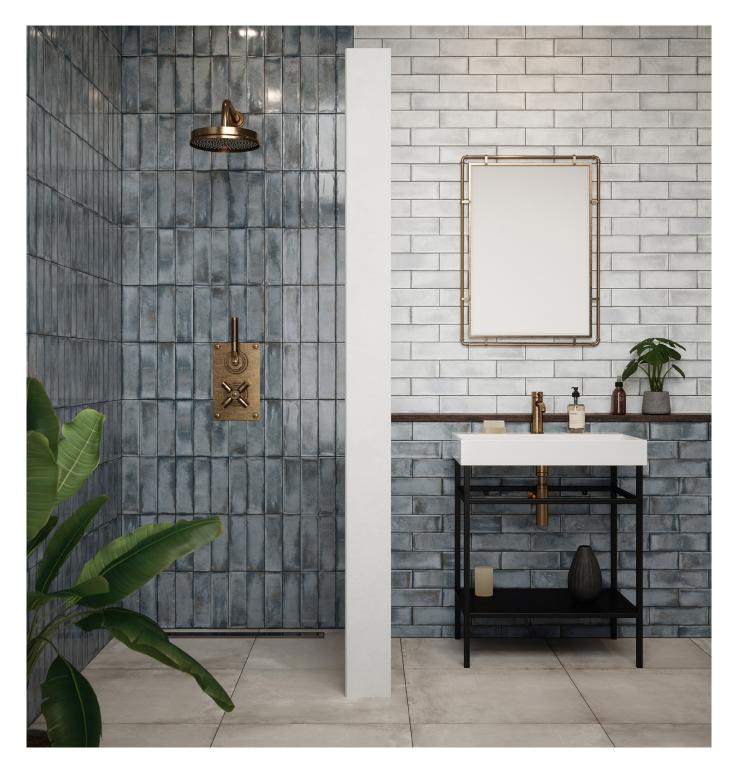










MELROSE

Manufactured in the UK, Melrose features a rustic structure combined with a glossy glaze to give a handcrafted aesthetic. With natural variation in colour and texture suitable for any interior space, Melrose offers 5 neutral tones of Bone, Pewter, Slate, Moss, and Stone. Available in an on-trend slim format of 245x75mm, Melrose provides a modern look ideal for any interior space.

Front Cover Image: Bone Gloss 245x75mm - MELRIA and Slate Gloss 245x75mm - MELR5A.

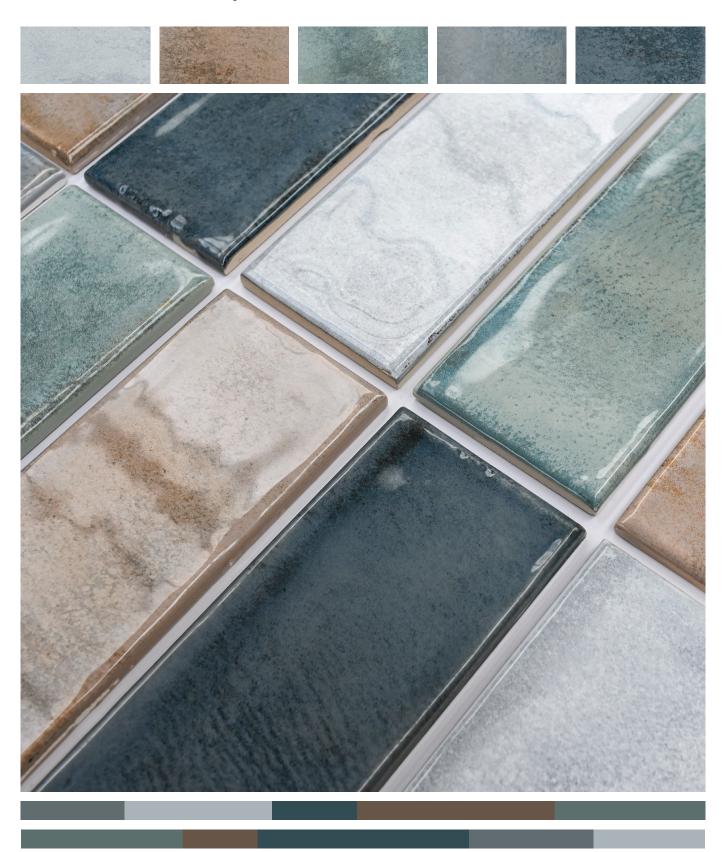


www.johnson-tiles.com







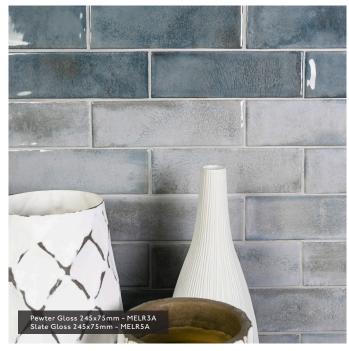

03 www.johnson-tiles.com

Colours & Product Codes V3: Moderate to High Shade Variation







Product Code: G MELR2A LRV: 31




MOSS Product Code: G MELR3A LRV: 38




PEWTER Product Code: G MELR4A LRV: 37



SLATE Product Code: G MELR5A LRV: 23

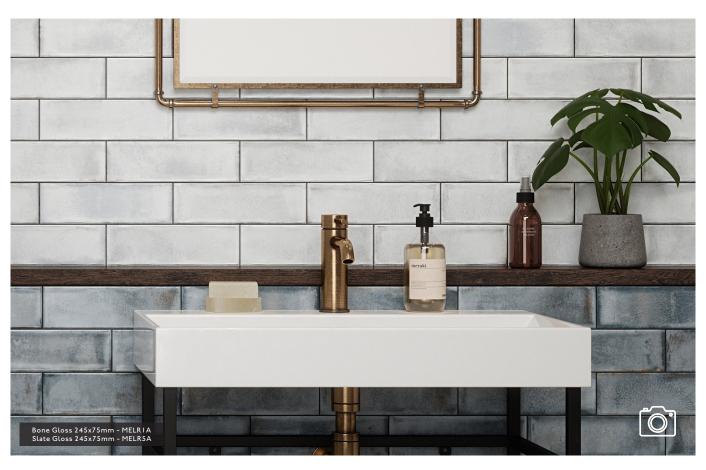




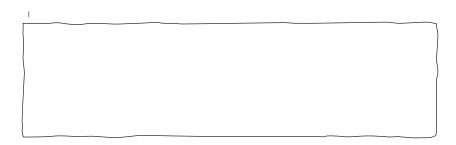

#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	245x75mm	G Gloss	All Colours Shown	8mm	54 Tiles	0.99 m²	16.00 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

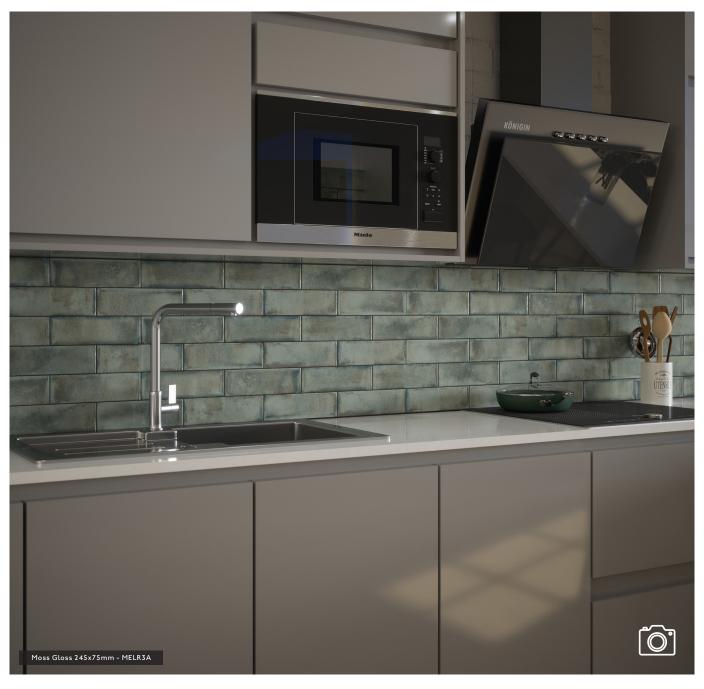

05 www.johnson-tiles.com



Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Melrose	All Sizes Shown G	Internal Only	-	-	V3	Glazed Ceramic [BIII]

Note: CSV: Colour Shade Variation. Key to Finishes:

G Gloss

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO I 0545 - 2	± 0.5% ≤ ± 2mm	± 0.25%	Modulus of Rupture EN ISO 10545 - 4	Min. I5N / mm²	≥ 25N / mm²
Thickness EN ISO 10545 - 2	± 10% ≤ ± 0.5mm	± 2.5%	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	± 0.3% ≤ ± 1.5mm	± 0.15%	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO I 0545 - 2	± 0.5% ≤ ± 2mm	± 0.4%	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A - B
Surface Flatness ↑↑ EN ISO I 0545 - 2	± 0.5% ≤ ± 2mm	± 0.3%	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class C
Water Absorption EN ISO 10545 - 3	10% to 20%	15% to 17%	Fire Rating	-	Class A I Non Combustible
kg Weight / M²	16.13 kg 8mm thick				

Note: All glazed ceramic [BIII] products shown in this range overview conform to BS EN 14411.

Range		EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Melrose	Glazed Ceramic [BIII]	Yes	Up to 20%	Up to 100%	Up to 100%

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- \bullet Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- \bullet Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.









For more information about Melrose or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ ◎ P in ▶

Where To Find Us

Johnson Tiles

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0) | 782 524 043 Fax: +44 (0) | 782 577 379

 ${\bf Email: samples@johnson-tiles.com}$

Technical Helpline

Email: techadvice@johnson-tiles.com

