
LUCCA

GLAZED PORCELAIN | FLOOR & WALL TILES

STONE PATTERN SPECKLE SELECT





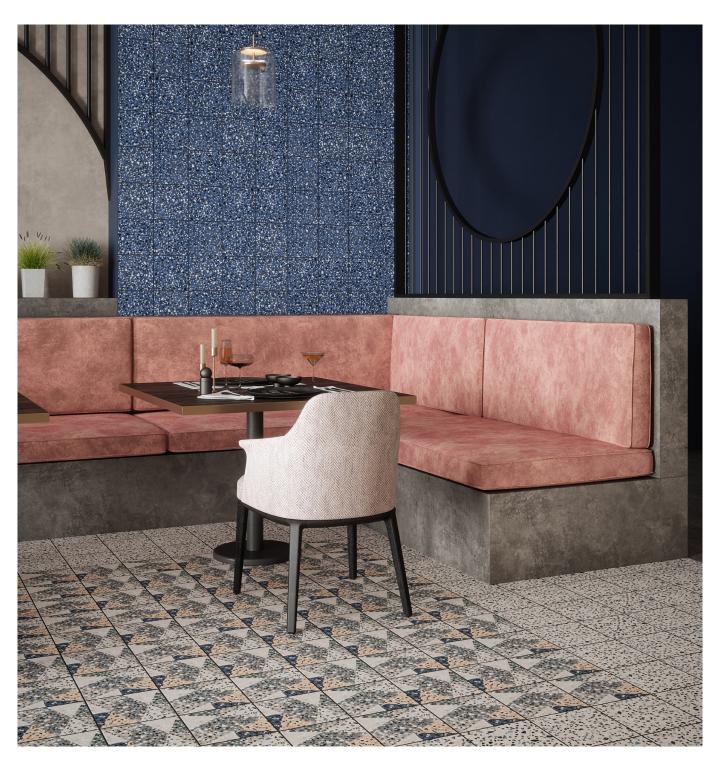










LUCCA

Bold in design and colour, Lucca provides a contemporary take on traditional terrazzo tiles. the 6 field products are available in White, Grey, Graphite, Blue, Green, and Pink with each colourway showcasing the look of embedded fragments. Tutti Frutti is more playful in its a ppearance with pastel colours taking centre stage. Lucca also includes décor products which play into the trend for geometric patterning, with Diamond, Triangle, and Square variations available.

Front Cover Image: White Natural 200x200mm - LUC0IN, Diamond Multi Décor Natutal 200x200mm - LUC1DN & Blue Natutal 200x200mm - LUC04N.
















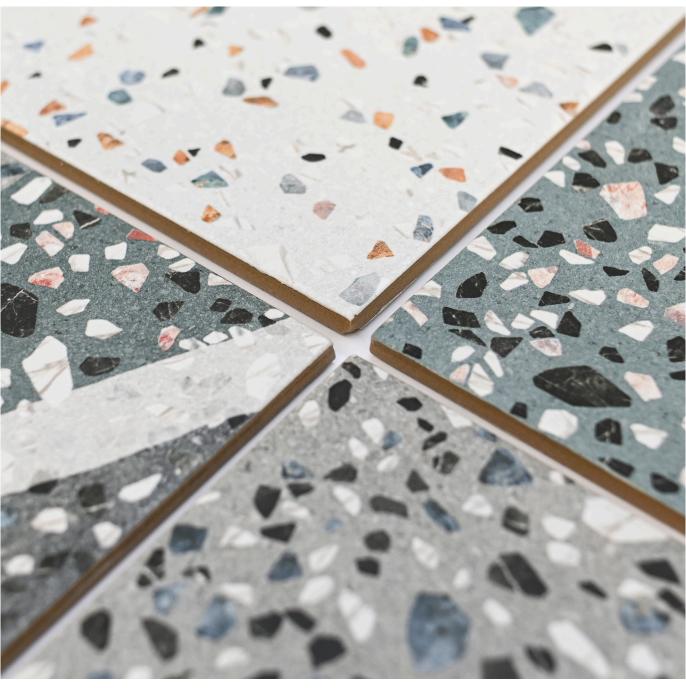


02 www.johnson-tiles.com










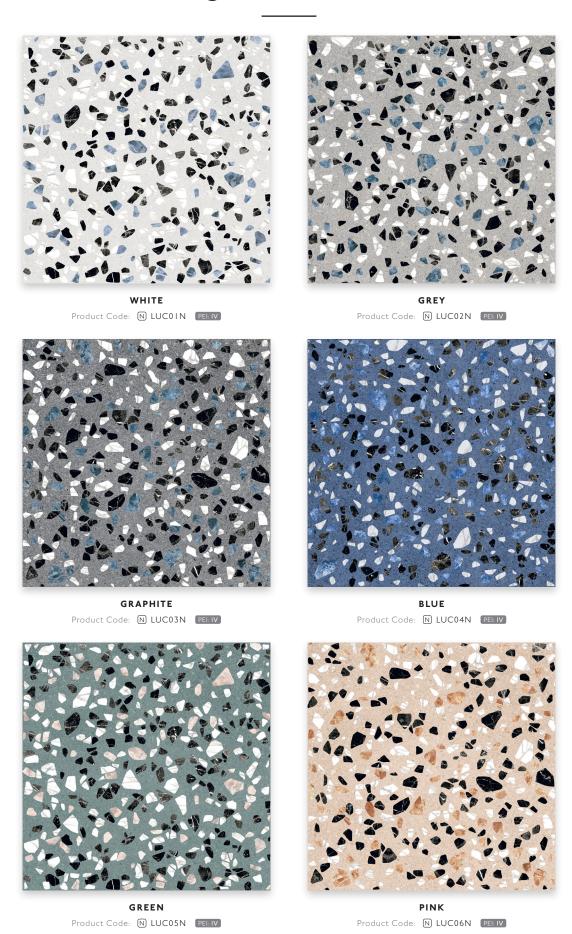



TUTTI FRUITTI
Product Code: N LUC07N PEI: IV



DIAMOND MULTI DÉCOR

Product Code: N LUCIDN PELIV




TRIANGLE MULTI DÉCOR


Product Code: N LUC2DN PEI: IV



SQUARE MUTLI DÉCOR Product Code: N LUC3DN PEI: IV

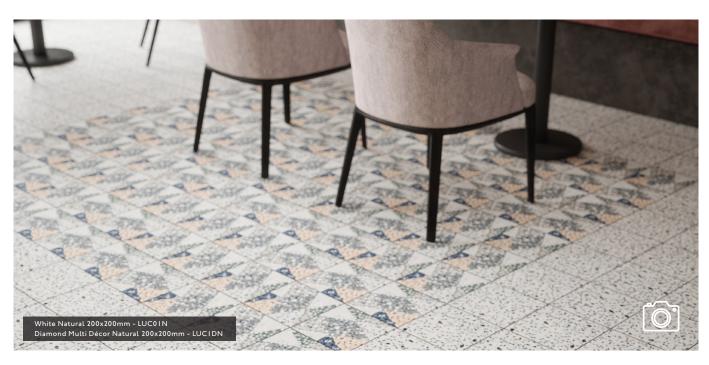





#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	200x200mm	N Natural	All Colours Shown	8mm	25 Tiles	1.00 m²	17.65 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website.





Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Lucca	All Sizes Shown N	Internal & External	Internal Only	-	V2	Glazed Porcelain [Bla]

Note: CSV: Colour Shade Variation. Key to Finishes: N Natural

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
N Natural	All Colours Shown	Dry 36+ Wet 36+	-	RIO	-	IV	Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130).

Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	± 0.6% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm²	Pass
Thickness EN ISO I 0545 - 2	± 5% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 0545 - 2	± 0.5% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 0545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Pass
Surface Flatness EN ISO 0545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Pass
Water Absorption EN ISO 10545 - 3	≤ 0.5%	Pass	Fire Rating	-	Class Alfl Non Combustible
kg Weight / M²	1 7.65 kg 8mm thick				

Note: All glazed porcelain [BIa] products shown in this range overview conform to BS EN 14411.

Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Lucca	Glazed Porcelain [Bla]	Yes	-	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- \bullet Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- \bullet Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.







For more information about Lucca or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ ◎ P in ▶

Where To Find Us

Johnson Tiles

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0) 1782 575 575 Fax: +44 (0) 1782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0) | 782 524 043 Fax: +44 (0) | 782 577 379

 ${\bf Email: samples@johnson-tiles.com}$

Technical Helpline

Tel: +44 (0) | 782 524 | | | | | Fax: +44 (0) | 782 577 379

Email: techadvice@johnson-tiles.com

