

SANCTUARY

GLAZED CERAMIC | WALL TILES

MARBLE EFFECT TILES **INTRO**



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

SANCTUARY

Sanctuary, inspired by classic marble patterns, has a neutral colour palette to provide a simple yet stylish design for residential applications. Colour offerings include Bianco Carrara for marbled veins with a pure white undertone, Horizon which brings a comforting warmth, perfect for creating a sense of relaxation, along with additional colour-ways of Matlock and Buxton – giving the illusion of natural stone.

Front Cover Image: Buxton Satin 300x200mm - BXTONA




Bianco Carrara Gloss 300x200mm - CTBC1A





Colours & Product Codes

V2: Low to Moderate Shade Variation

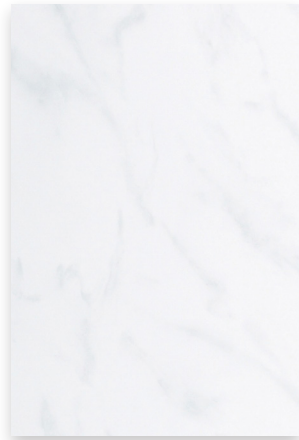

BIANCO CARRARA

☐ CTBC1A + ☐ CTBC2A LRV: 86



MATLOCK

☐ MLOCKA + ☐ MLOCKS LRV: 75



HORIZON

☐ HOR101 LRV: 71



BUXTON

☐ BXTONA LRV: 70



Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	300x200mm	☐ Gloss	Bianco Carrara, Matlock and Horizon Only	8mm	17 Tiles	1.02 m ²	14.00 kg
		☐ Satin	Bianco Carrara, Matlock, and Buxton Only	8mm	17 Tiles	1.02 m ²	14.00 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Sanctuary	All Sizes Shown	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\leq \pm 0.25\%$	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm ²	$\geq 25\text{N} / \text{mm}^2$
Thickness EN ISO 10545 - 2	$\pm 1.0\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.15\%$	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A - B
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.3\%$	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 3
Water Absorption EN ISO 10545 - 3	10% to 20%	15% to 17%	Fire Rating	-	Class A1 Non Combustible
Weight / M ²	14.10 kg 8mm thick				

Note: All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD	SKA Rating
Sanctuary	Glazed Ceramic [BIII]	Up to 20%	Up to 100%	Up to 100%	-	-

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Sanctuary or
any of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

JOHNSON • TILES 
MADE IN THE UK SINCE 1901