
ABSTRACT

GLAZED CERAMIC | WALL TILES

PLAIN COLOUR TILES (ABSOLUTE)





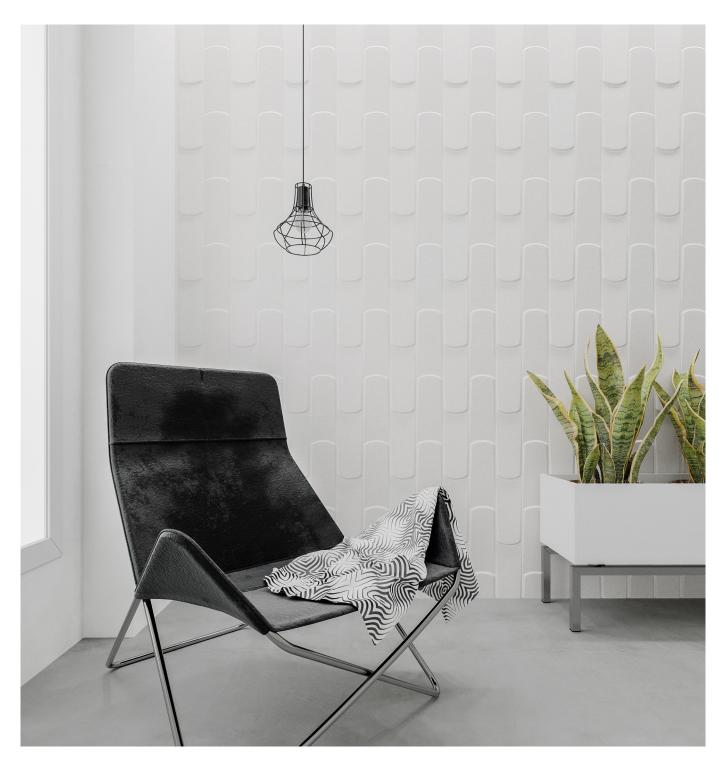




ABSTRACT

Not for the faint hearted, Abstract is perfect for making a bold statement to bring character and personality to any space. Roaming from the powerful to the playful, this range offers a striking selection of colour options, including White, Black, Steel, and a Pastel Mix of fifteen softer hues.

Coupled with the daring shapes of the 200x200mm Chevron and 250x100mm Droplet, this special-order range is ideal to create a stunning feature wall or highlight a splash back. Abstract delivers a tactile quality providing dimension and texture to deepen the visual interest of every installation.

Front Cover Image: White Droplet Matt 250x100mm - ABSTID

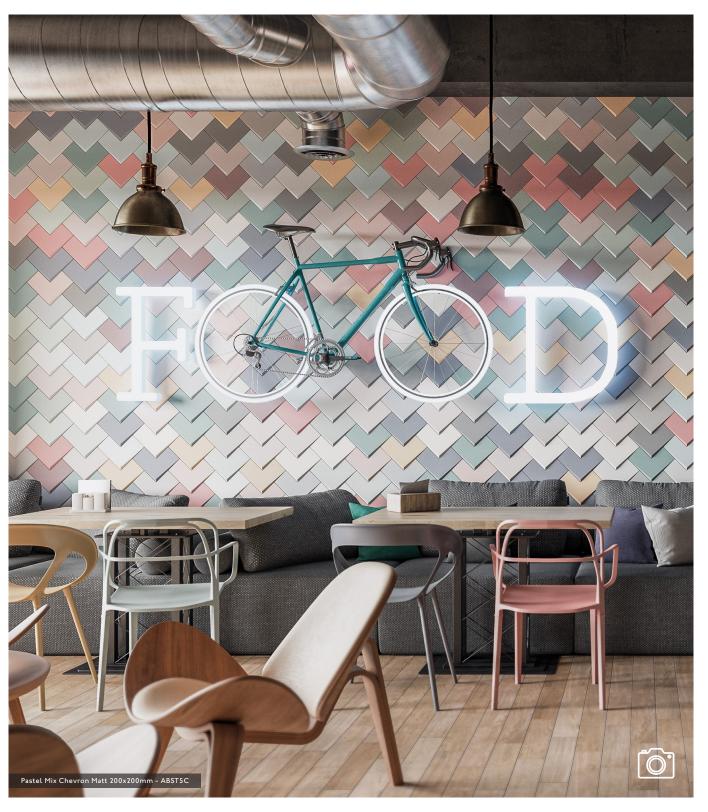

02 www.johnson-tiles.com



Roomset Photography









Colours & Product Codes

VI: Low Shade Variation



WHITE DROPLET M ABSTID LRV: 81



BLACK DROPLET M ABST2D LRV: 10



STEEL DROPLET





WHITE CHEVRON M ABSTIC LRV: 81



BLACK CHEVRON M ABST2C LRV: 10



STEEL CHEVRON

E ABST4C LRV: 6





PASTEL MIX DROPLET






PASTEL MIX CHEVRON

M ABST5C



Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
I	250x100mm Droplet	G Gloss	White, Black, & Pastel Mix Only	8mm - 14mm	24 Tiles	0.63 m²	9.77 kg
		E Metallic	Steel Only	8mm - I 4mm	24 Tiles	0.63 m²	9.77 kg
2	200x200mm Chevron	G Gloss	White, Black, & Pastel Mix Only	8mm - 14.5mm	23 Tiles	0.69 m²	10.7 l kg
		E Metallic	Steel Only	8mm - 14.5mm	23 Tiles	0.69 m²	10.71 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.





Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Abstract	All Sizes Shown G E	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO I 0545 - 2	± 0.5% ≤ ± 2mm	± 0.5%	Modulus of Rupture EN ISO 10545 - 4	Min. I 5N / mm²	≥ 15N / mm²
→ Thickness EN ISO I 0545 - 2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
Surface Flatness EN ISO I 0545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO I 0545 - 3	10% to 20%	> 10%	Fire Rating	-	Class A I Non Combustible
kg Weight / M²	I 5.60 kg Droplet	15.60 kg Chevron			

Note: All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Abstract	Glazed Ceramic [BIII]	Yes	Up to 80%	-	-

Note: EPD: Environmental Product Declaration for the products shown in this overview can be on the Abstract pages on our website.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- \bullet Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- \bullet Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2023 Johnson Tiles. All rights reserved.





For more information about **Abstract** or any of our other product ranges simply visit **www.johnson-tiles.com** | f **y o p** in **D**

Where To Find Us

Johnson Tiles Harewood Street, Tunstall, Stoke on Trent, Staffordshire.

ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0) | 782 524 043 Fax: +44 (0) | 782 577 379 Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0) 1782 524 111 Fax: +44 (0) 1782 577 379 Email: techadvice@johnson-tiles.com

